


FIXED CALIPER

P4 30/34 A 20 . 4756 . ⁵²

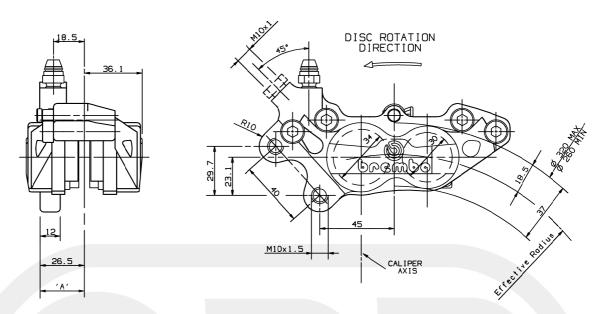


DESCRIPTION

Fixed caliper with 4 opposed pistons, realized by semicalipers joined by bolts. Pads are supported by two pins. Construction Material: Aluminium Alloy Hard Oxidation.

Operating fluid: brake fluid DOT4.

N.B.: drawing shows left side caliper.
Code 20.4756.52
Mounting side behind the fork.

PADS SHAPE AND DIMENSIONS



TECHNICAL CHARACTERISTICS

Pistons number and diameter: 4 30/34 mm Average pad surface (without cut): (with cut): 23 cm² 20 cm² MAX working pressure: 40 bar Weight (with sintered pads): A) Disc position (TOLERANCE): ±0.7 mm

CONFIGURATION

CODE CALIPER	PADS FRICTION MATERIAL	BODY COLOR	MOUNT. SIDE	USABLE DISCS THICKNESS
20.4756.52	BREMBO J01	GOLD	SX DX	5.0 mm

AVAILABLE SPARE PARTS

CODE PARE CAL IPER	PADS WITH CUT	PADS WITH CUT	BLEEDER SCREW	BOOTS	PIN	RETAINER
20.4756.52	107.4426.50	107.6930.30 (Z01)	105.2812.13	105.1502.10	120.3840.81	105.4542.21

Indicating informations subject to modification. For further specifications contact Technical Section.

LAST UPDATE: 19/10/1992

0.780 Kg